




TUXS-series

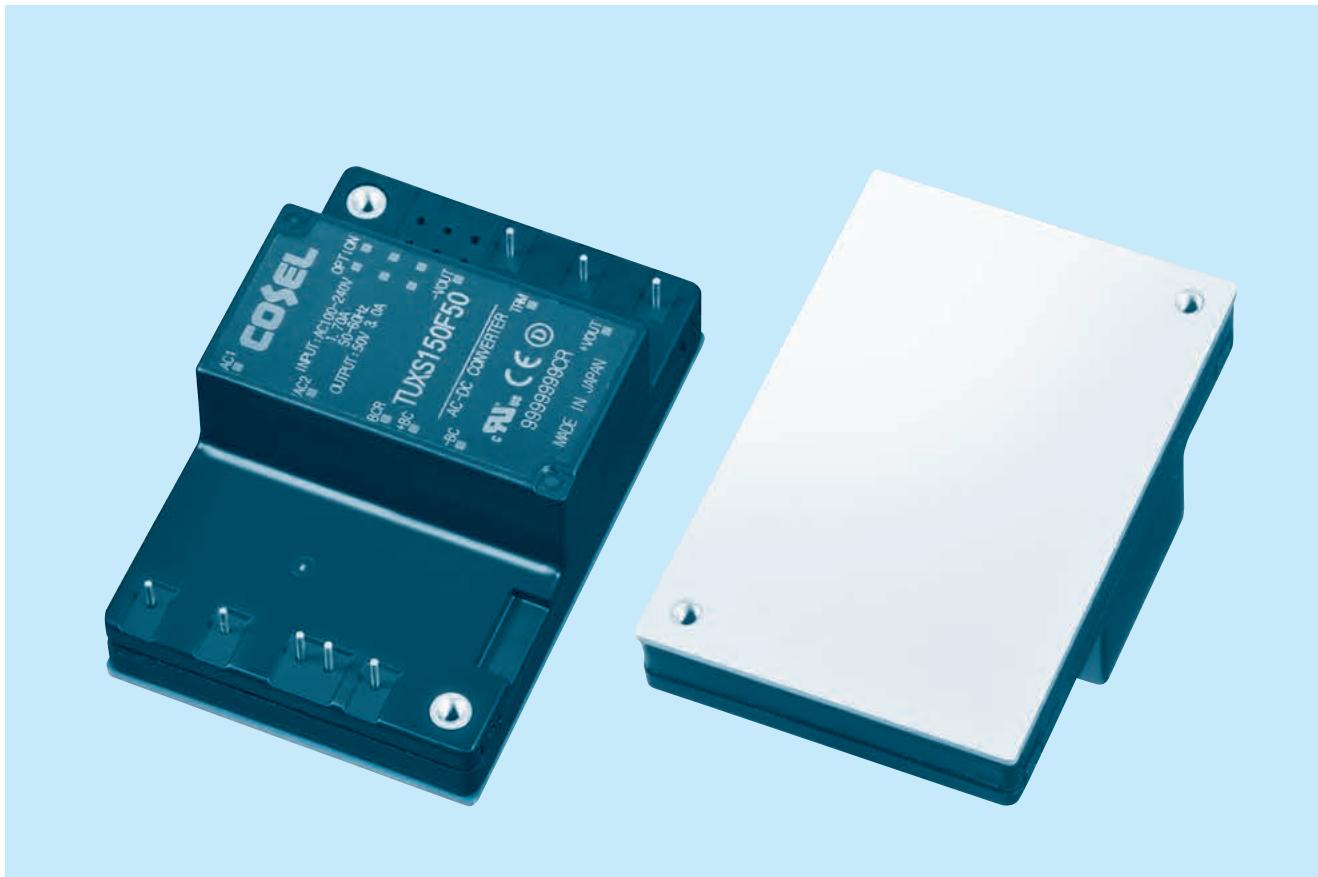

■ Feature

AC-DC Power Module Type Converter
 Harmonic attenuator (Complies with IEC61000-3-2 class A)
 Small size
 Built-in overcurrent, overvoltage and thermal protection circuits
 Mounting hole (M3 tapped)
 High efficiency 94%

■ CE marking

Low voltage directive
 RoHS Directive

■ UKCA marking

Electrical Equipment Safety Regulations
 RoHS Regulations

■ Safety Approval

UL60950-1, C-UL, EN62368-1

■ 5-year warranty

TUXS150F


Ordering information

TUX S 150 F 50 -□

(1) (2) (3) (4) (5) (6) (8)



RoHS

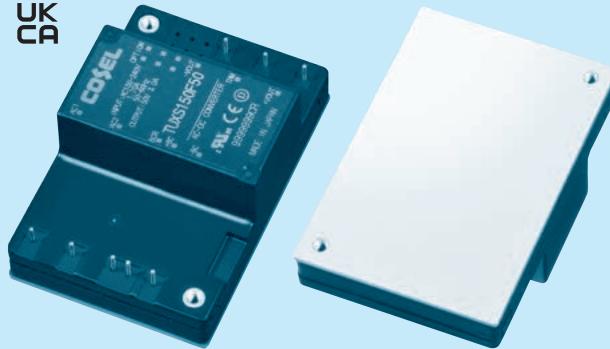

- (1) Series name
- (2) Single output
- (3) Output wattage
- (4) Universal Input
- (5) Output voltage
- (6) Optional
- T : with Mounting hole ($\phi 3.4$ thru)
- N: Auto restart in protection circuit working

* Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
 * Keep TRM open, if output voltage adjustment is not necessary.

MODEL	TUXS150F50	
MAX OUTPUT WATTAGE[W]	150.0	
DC OUTPUT	50V 3A	

SPECIFICATIONS



	MODEL		TUXS150F50
INPUT		VOLTAGE[V]	AC85 - 264 1 ϕ
CURRENT[A]	ACIN 100V	1.70typ (Io=100%)	
	ACIN 200V	0.80typ (Io=100%)	
FREQUENCY[Hz]		50/60 (45 - 66)	
EFFICIENCY[%]	ACIN 100V	93typ	
	ACIN 200V	94typ	
POWER FACTOR (Io=100%)	ACIN 100V	0.96typ	
	ACIN 200V	0.93typ	
INRUSH CURRENT		Limited by external components (Thermistor)	
LEAKAGE CURRENT[mA]		0.75max (ACIN 240V 60Hz, Io=100%, According to IEC62368-1)	
OUTPUT		VOLTAGE[V]	50
CURRENT[A]		CURRENT[A]	3
LINE REGULATION[mV]		LINE REGULATION[mV]	100max
LOAD REGULATION[mV]		LOAD REGULATION[mV]	100max
RIPPLE[mVp-p]	-20 to +100°C *1	200max	
	-40 to -20°C *1	300max	
RIPPLE NOISE[mVp-p]	-20 to +100°C *1	200max	
	-40 to -20°C *1	300max	
TEMPERATURE REGULATION[mV]	0 to +100°C	500max	
	-40 to +100°C	1000max	
DRIFT[mV]		*2	200max
OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		Fixed (TRM pin open), adjustable by external resistor or external signal	
		45.0 - 55.0	
OUTPUT VOLTAGE SETTING[V]		49.2 - 50.8	
PROTECTION CIRCUIT AND OTHERS		OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically
		OVERVOLTAGE PROTECTION[V]	57.5 - 67.5
		REMOTE SENSING	Not provided
		REMOTE ON/OFF	Not provided
ISOLATION		INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min ($20 \pm 15^\circ\text{C}$)
		INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min ($20 \pm 15^\circ\text{C}$)
		OUTPUT-FG	AC500V 1minute, Cutoff current = 100mA, DC500V 50M Ω min ($20 \pm 15^\circ\text{C}$)
ENVIRONMENT		OPERATING TEMP., HUMID. AND ALTITUDE	-40 to +100°C (On aluminum base plate), 20 - 95%RH (Non condensing) (Refer to "Derating"), 4,000m (13,000 feet) max
		STORAGE TEMP., HUMID. AND ALTITUDE	-40 to +100°C, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max
		VIBRATION	10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis
		IMPACT	196.1m/s ² (20G), 11ms, once each along X, Y and Z axis
SAFETY AND NOISE REGULATIONS		AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN62368-1
		HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Class A) *3
OTHERS		CASE SIZE/WEIGHT	76.2 X 28.5 X 50.8mm [3.0 X 1.12 X 2.0 inches] (W X H X D) / 150g max
		COOLING METHOD	Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)

*1 Refer to instruction manual for measuring method of electric characteristics.

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*3 Please contact us about another class.

External view

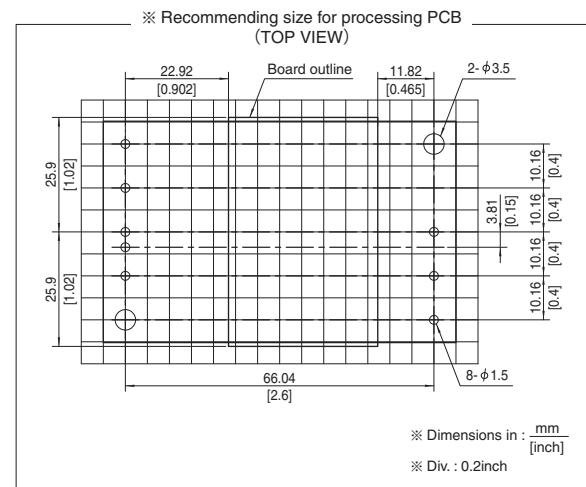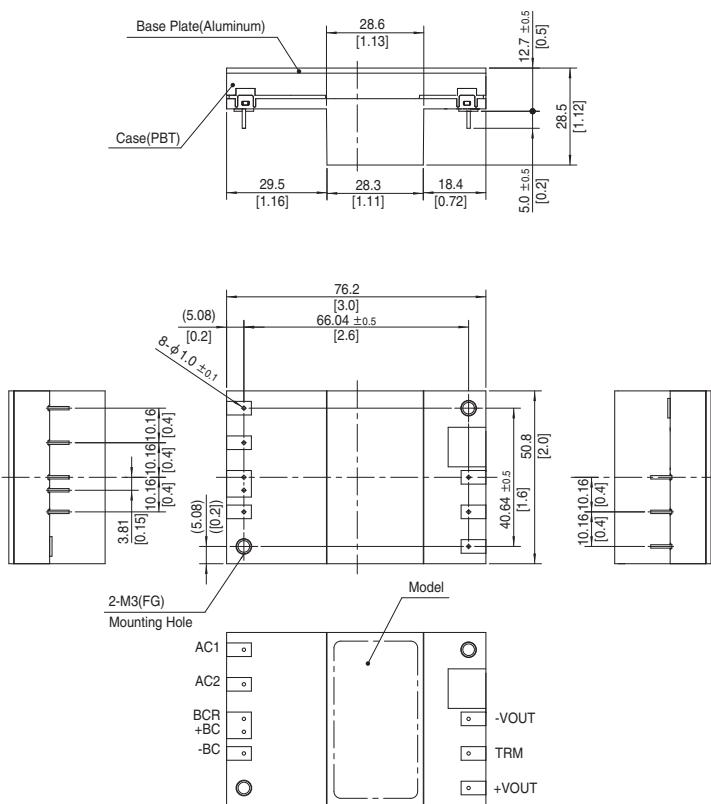


※ Tolerance : ± 0.3 [± 0.012]
 ※ Weight : 150g max
 ※ Dimensions in mm, []=inches
 ※ Mounting hole screwing torque : 0.49N/m (5.0kgf/cm) max

TUXS200F

Ordering information

TUX S 200 F 50 -□① ② ③ ④ ⑤ ⑥

RoHS

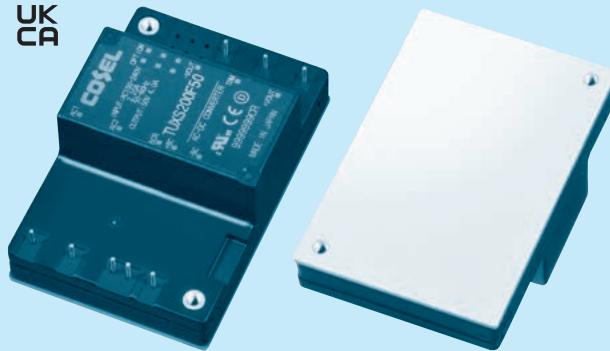

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal Input
- ⑤ Output voltage
- ⑥ Optional

T : with Mounting hole (φ3.4 thru)
N: Auto restart in protection circuit working

* Avoid short circuit between +BC and -BC. It may cause the failure of inside components.

* Keep TRM open, if output voltage adjustment is not necessary.

MODEL	TUXS200F24	TUXS200F28	TUXS200F32	TUXS200F42	TUXS200F50
MAX OUTPUT WATTAGE[W]	199.2	196.0	198.4	197.4	200.0
DC OUTPUT	24V 8.3A	28V 7.0A	32V 6.2A	42V 4.7A	50V 4.0A

SPECIFICATIONS



	MODEL	TUXS200F24	TUXS200F28	TUXS200F32	TUXS200F42	TUXS200F50
INPUT	VOLTAGE[V]	AC85 - 264 1φ				
	CURRENT[A]	ACIN 100V 2.20typ (Io=100%)				
		ACIN 200V 1.10typ (Io=100%)				
	FREQUENCY[Hz]	50/60 (45 - 66)				
	EFFICIENCY[%]	ACIN 100V 90typ	90typ	91typ	91typ	92typ
		ACIN 200V 91typ	91typ	92typ	92typ	93typ
	POWER FACTOR (Io=100%)	ACIN 100V 0.96typ				
		ACIN 200V 0.93typ				
	INRUSH CURRENT	Limited by external components (Thermistor)				
	LEAKAGE CURRENT[mA]	0.75max (ACIN 240V 60Hz, Io=100%, According to IEC62368-1)				
OUTPUT	VOLTAGE[V]	24	28	32	42	50
	CURRENT[A]	8.3	7.0	6.2	4.7	4.0
	LINE REGULATION[mV]	48max	56max	64max	84max	100max
	LOAD REGULATION[mV]	48max	56max	64max	84max	100max
	RIPPLE[mVp-p]	-20 to +100°C *1 144max	168max	192max	252max	300max
		-40 to -20°C *1 192max	224max	256max	336max	400max
	RIPPLE NOISE[mVp-p]	-20 to +100°C *1 144max	168max	192max	252max	300max
		-40 to -20°C *1 192max	224max	256max	336max	400max
	TEMPERATURE REGULATION[mV]	0 to +100°C 240max	280max	320max	420max	500max
		-40 to +100°C 480max	560max	640max	820max	1000max
PROTECTION CIRCUIT AND OTHERS	DRIFT[mV]	*2 96max	112max	128max	168max	200max
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	Fixed (TRM pin open), adjustable by external resistor or external signal				
		21.60 - 26.40	25.20 - 30.80	28.80 - 35.20	37.80 - 46.20	45.00 - 55.00
	OUTPUT VOLTAGE SETTING[V]	23.62 - 24.38	27.55 - 28.45	31.49 - 32.51	41.33 - 42.67	49.20 - 50.80
ISOLATION	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically				
	OVERVOLTAGE PROTECTION[V]	27.60 - 28.80	32.20 - 33.60	36.80 - 38.40	48.30 - 50.40	57.50 - 60.00
	REMOTE SENSING	Not provided				
	REMOTE ON/OFF	Not provided				
ENVIRONMENT	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C)				
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C)				
	OUTPUT-FG	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (20±15°C)				
	OPERATING TEMP., HUMID. AND ALTITUDE	-40 to +100°C (On aluminum base plate), 20 - 95%RH (Non condensing) (Refer to "Derating"), 4,000m (13,000 feet) max				
SAFETY AND NOISE REGULATIONS	STORAGE TEMP., HUMID. AND ALTITUDE	-40 to +100°C, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max				
	VIBRATION	10 - 55Hz, 49.0m/s² (5G), 3minutes period, 60minutes each along X, Y and Z axis				
	IMPACT	196.1m/s² (20G), 11ms, once each along X, Y and Z axis				
OTHERS	AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN62368-1				
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Class A) *3				
OTHERS	CASE SIZE/WEIGHT	76.2×28.5×50.8mm [3.0×1.12×2.0 inches] (W×H×D) / 150g max				
	COOLING METHOD	Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)				

*1 Refer to instruction manual for measuring method of electric characteristics.


*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*3 Please contact us about another class.

External view

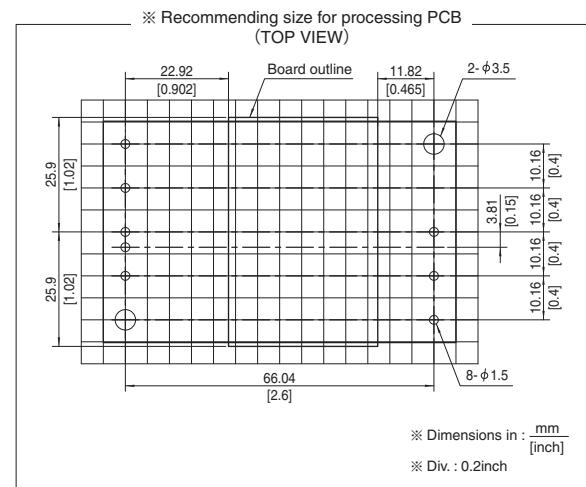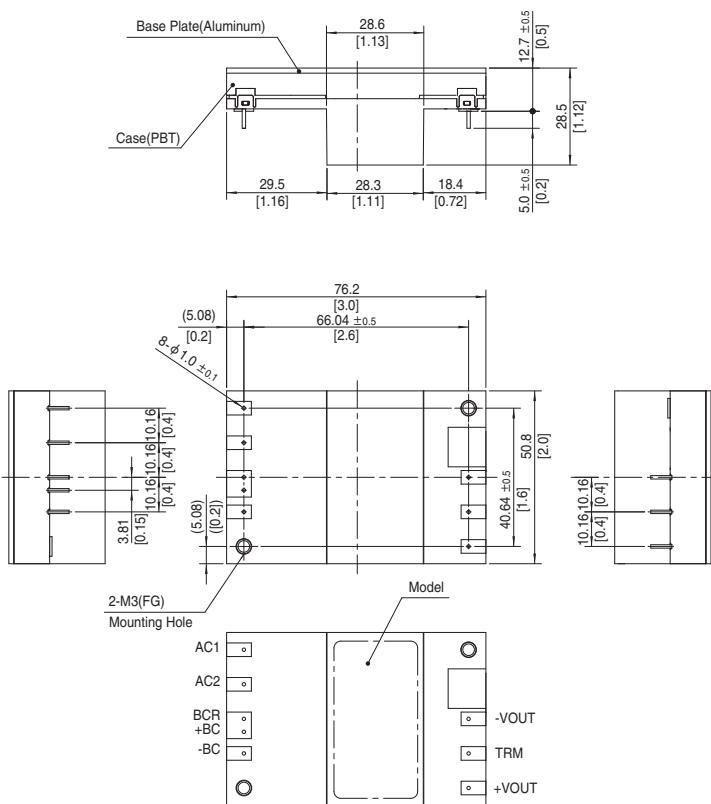

※ Tolerance : ± 0.3 [± 0.012]
 ※ Weight : 150g max
 ※ Dimensions in mm, []=inches
 ※ Mounting hole screwing torque : 0.49N/m (5.0kgf/cm) max

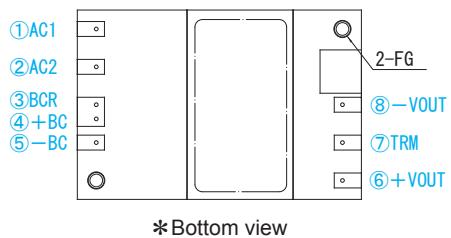Pin Configuration


No.	Pin Connection	Function
①	AC1	AC input
②	AC2	
③	BCR	+BC output
④	+BC	+BC output
⑤	-BC	-BC output
⑥	+VOUT	+DC output
⑦	TRM	Adjustment of output voltage
⑧	-VOUT	-DC output
-	FG	Mounting hole (FG)


Implementation • Mounting Method
Mounting method

- The unit can be mounted in any direction. When two or more power supplies are used side by side, position them with proper intervals to allow enough air ventilation. Aluminum base plate temperature of each power supply should not exceed the temperature range shown in "Derating".
- Avoid placing the AC input line pattern layout underneath the unit. It will increase the line conducted noise. Make sure to leave an ample distance between the line pattern layout and the unit. Also avoid placing the DC output line pattern underneath the unit because it may increase the output noise. Lay out the pattern away from the unit.
- Avoid placing the signal line pattern layout underneath the unit because the power supply might become unstable. Lay out the pattern away from the unit.
- High-frequency noise radiates directly from the unit to the atmosphere. Therefore, design the shield pattern on the printed circuit board and connect it to FG. The shield pattern prevents noise radiation.
- When a heat sink cannot be fixed on the base plate side, order the power module with "-T" option. A heat sink can be mounted by affixing a M3 tap on the heat sink. Please make sure a mounting hole will be connected to a grounding capacitor CY.

	Mounting hole
Standard	M3 tapped
Optional : -T	ϕ3.4 thru

Stress onto the pins

- When too much stress is applied to the pins may damage internal connections. Avoid applying stress in excess of that shown in right figure.
- The pins are soldered onto the internal PCB. Therefore, Do not bend or pull the leads with excessive force.
- Mounting hole diameter of PCB should be 3.5mm to reduce the stress to the pins.
- Fix the unit on PCB (fixing fittings) by screws to reduce the stress to the pins. Be sure to mount the unit first, then solder the unit.


Soldering



- Flow soldering : 260°C less than 15 seconds.
- Soldering iron (26W) : 450°C less than 5 seconds.

Derating

Output voltage derating curve

■ Use the power modules with conduction cooling (e.g. heat dissipation from the aluminum base plate to the attached heat sink). Below shows the derating curves with respect to the aluminum base plate temperature. Note that operation within the hatched areas will cause a significant level of ripple and ripple noise.

■ Please measure the temperature on the aluminum base plate edge side when you cannot measure the temperature of the center part of the aluminum base plate. In this case, please take 5deg temperature margin from the derating characteristics shown in Below. Please reduce the temperature fluctuation range as much as possible when the up and down of the temperature are frequently generated. Contact us for more information on cooling methods.

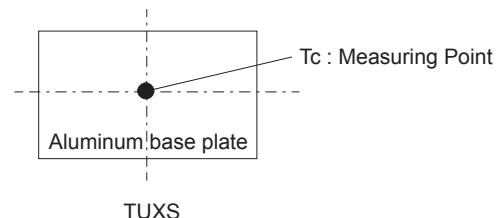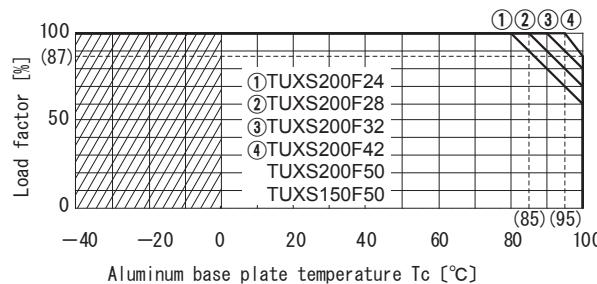

Instruction Manual

◆ It is necessary to read the "Instruction Manual" and "Before using our product" before you use our product.

Instruction Manual <https://www.cosel.co.jp/redirect/catalog/en/TUXS/>
 Before using our product <https://en.cosel.co.jp/technical/caution/index.html>

TUXS

NOTICE



Basic Characteristics Data

Model	Circuit method	Switching frequency [kHz]	Input current [A] *1	Inrush current protection circuit	PCB/Pattern			Series/Parallel operation availability	
					Material	Single sided	Double sided	Series operation	Parallel operation
TUXS150F	Active filter	80-600	1.70	Thermistor	Aluminum	Yes		Yes	*2
	LLC resonant converter	100-300							
TUXS200F	Active filter	80-600	2.20	Thermistor	Aluminum	Yes		Yes	*2
	LLC resonant converter	100-300							

*1 The value of input current is at ACIN 100V and rated load.

*2 Refer to instruction manual.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[TUXS150F50](#) [TUXS200F32](#) [TUXS200F28](#) [TUXS200F50](#) [TUXS200F42](#) [TUXS200F24](#)