

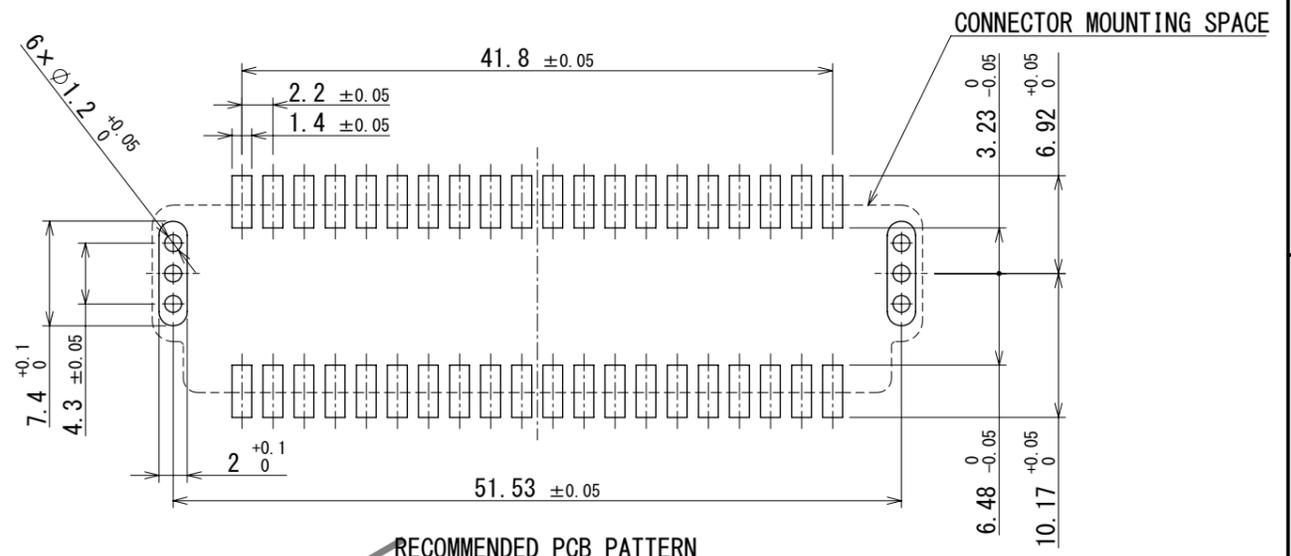
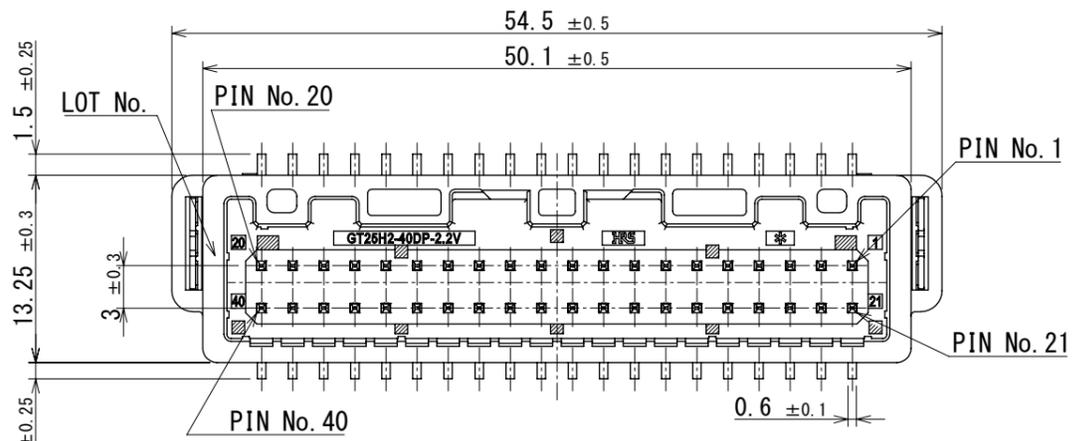


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


ELV, RoHS COMPLIANT

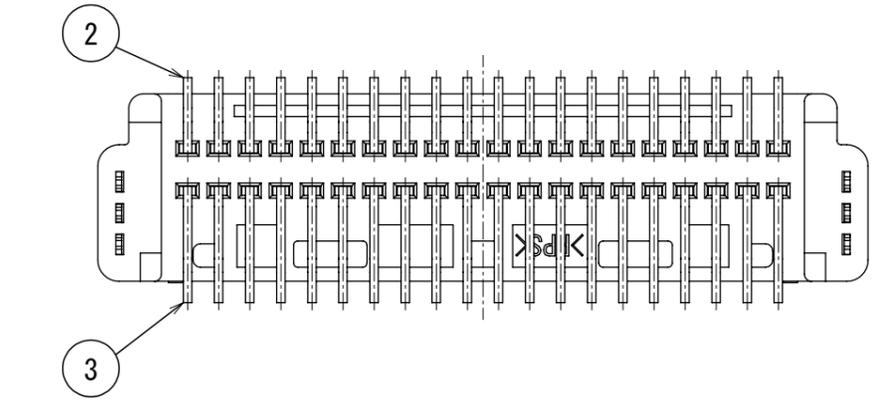

RECOMMENDED PCB PATTERN

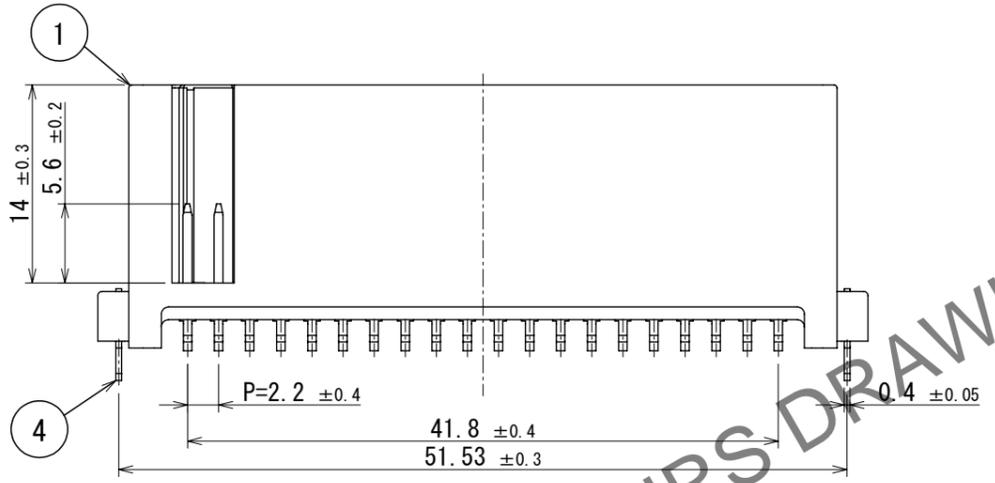

- NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW (REFER TO RIGHT FIG.) USED REFLOW SYSTEM**
- NO. OF CYCLES : IR IN THE AIR OR NITROGEN
 - PEAK : 250°C
 - OVER 230°C : 20~40s
 - PREHEAT : 150~180°C
 - 60~120s
- 2. TEMPERATURE FOR SOLDERING IRON : 280~300°C WITHIN 2s**
- 3. CO-PLANARITY : 0.1mm MAX**
- 4. RECOMMENDED PCB THICKNESS : 1.6mm**
- 5. RECOMMENDED SOLDER THICKNESS : 0.15mm**

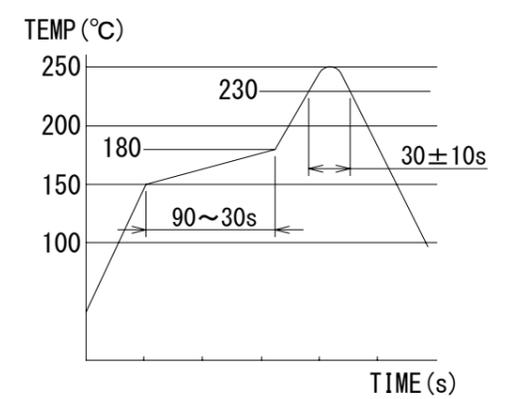

2	BRASS	TIN PLATED T=0.64	4	BRASS	TIN PLATED T=0.4		
1	PPS	BLACK	3	BRASS	TIN PLATED T=0.64		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
UNITS mm		SCALE 2:1		COUNT 1		DESCRIPTION OF REVISIONS DIS-T-00023777	
DESIGNED AN. SAIKI		CHECKED TY. MOGI		DATE 2025.07.29		DRAWING NO. EDC-360215-00-00	
APPROVED : AR. SHIRAI 2016.07.27		CHECKED : HS. OZAWA 2016.07.27		DESIGNED : TK. SHISHIKURA 2016.07.27		DRAWN : TK. SHISHIKURA 2016.07.27	
PART NO. GT25H2-40DP-2.2V		CODE NO. CL0775-0085-3-00		DRAWING NO. EDC-360215-00-00		PART NO. GT25H2-40DP-2.2V	

△ CAD Change