
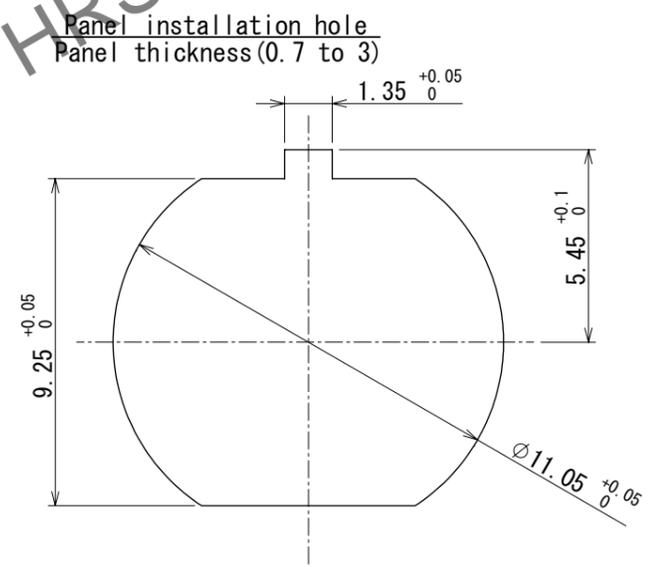
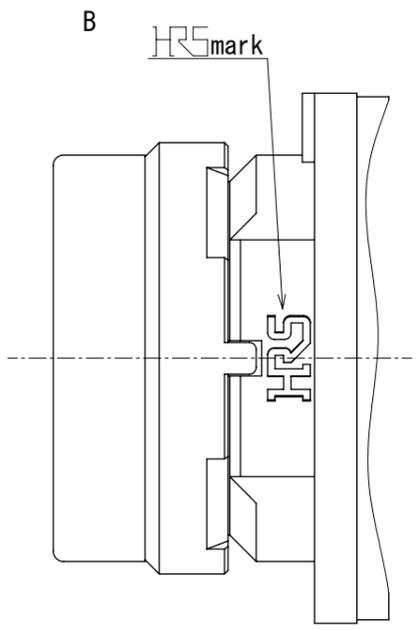
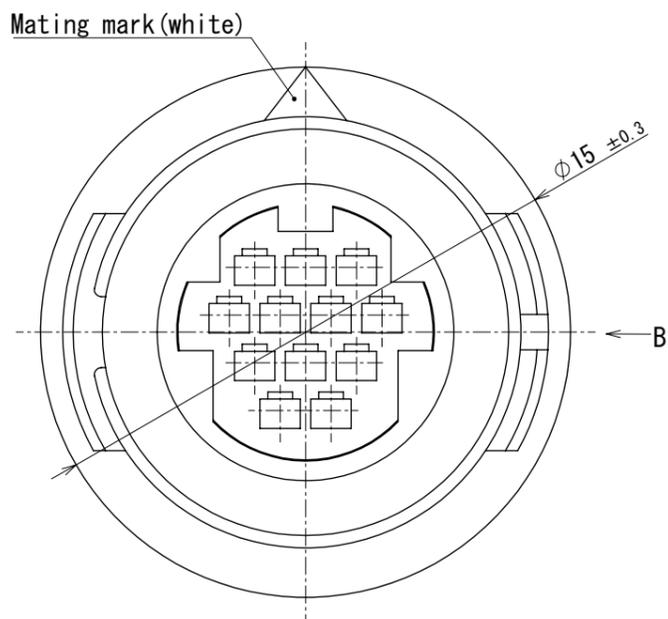
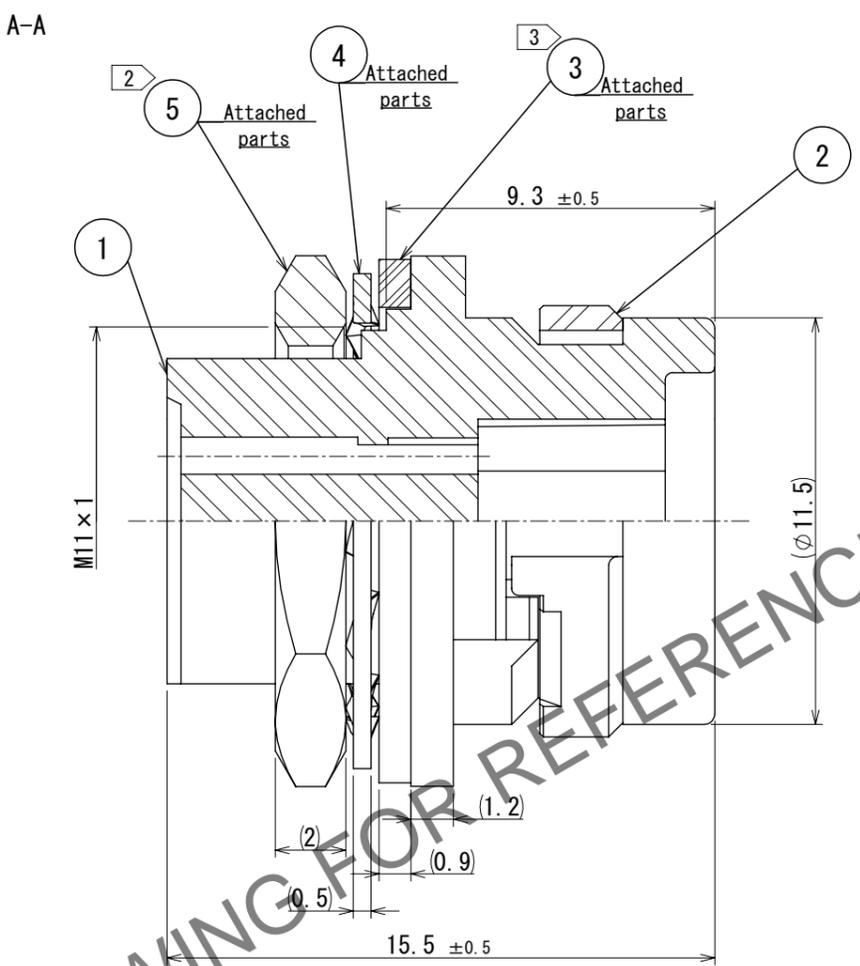


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

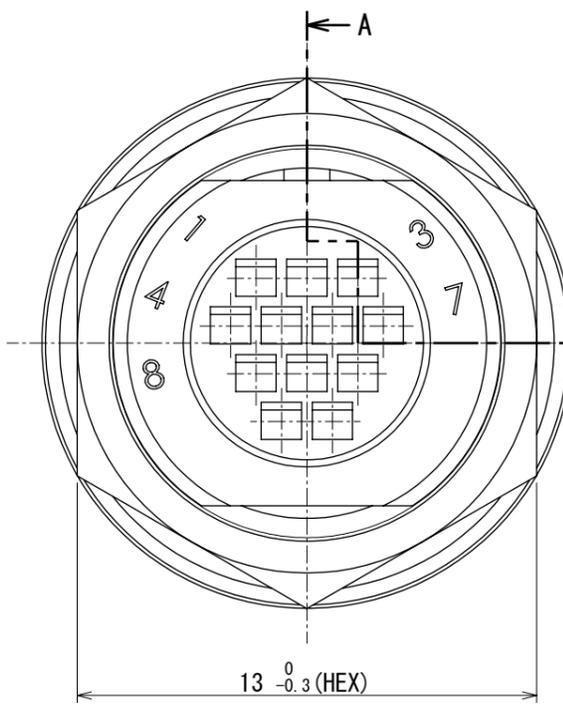

HRS DRAWING FOR REFERENCE

- Notes**
- Applicable crimping contact: HR30-PC-211
(Applicable wire: 26 to 30 AWG wire jacket diameter: φ1 max)
Applicable crimp contact extraction tool: HR30-TP
 - The recommended clump torque of Ref. No. ⑤ to be 0.8N·m.
 - LOCTITE 263, LOCPRIMER 7649, ROCTITE JAPAN apply to prevent Ref. No. ⑤ from loosening.
 - When this connector is mounted on to panel, be careful Ref. No. ③ is assembled surely Ref. No. ① as shown in this figure to keep waterproof effectiveness.
 - The assembly of this product applies to the manual ETAD-C0302-00.

△ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	Chloroprene rubber	(Black)					
2	Polyphenylene sulfide	(Black) UL94V-0		5	Brass	Nickel plating	
1	Polyphenylene sulfide	(Black) UL94V-0		4	Phosphor bronze	Nickel plating	

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5:1	2	DIS-C-00019296	KS. TAKAHASHI	TP. KOMATSU	2025.02.26

APPROVED	CHECKED	DESIGNED	DRAWN	DRAWING NO.	PART NO.	CODE NO.
HY. KOBAYASHI	HY. KOBAYASHI	DS. MATSUNE	DS. MATSUNE	EDC-112155-31-00	HR30-7R-12PC (31)	CL0130-1013-8-31
2018.03.12	2018.03.12	2018.03.12	2018.03.12			