
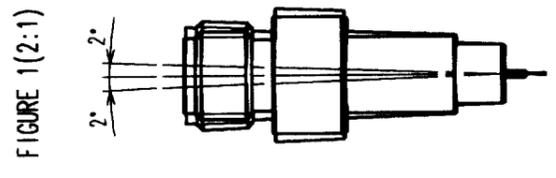


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

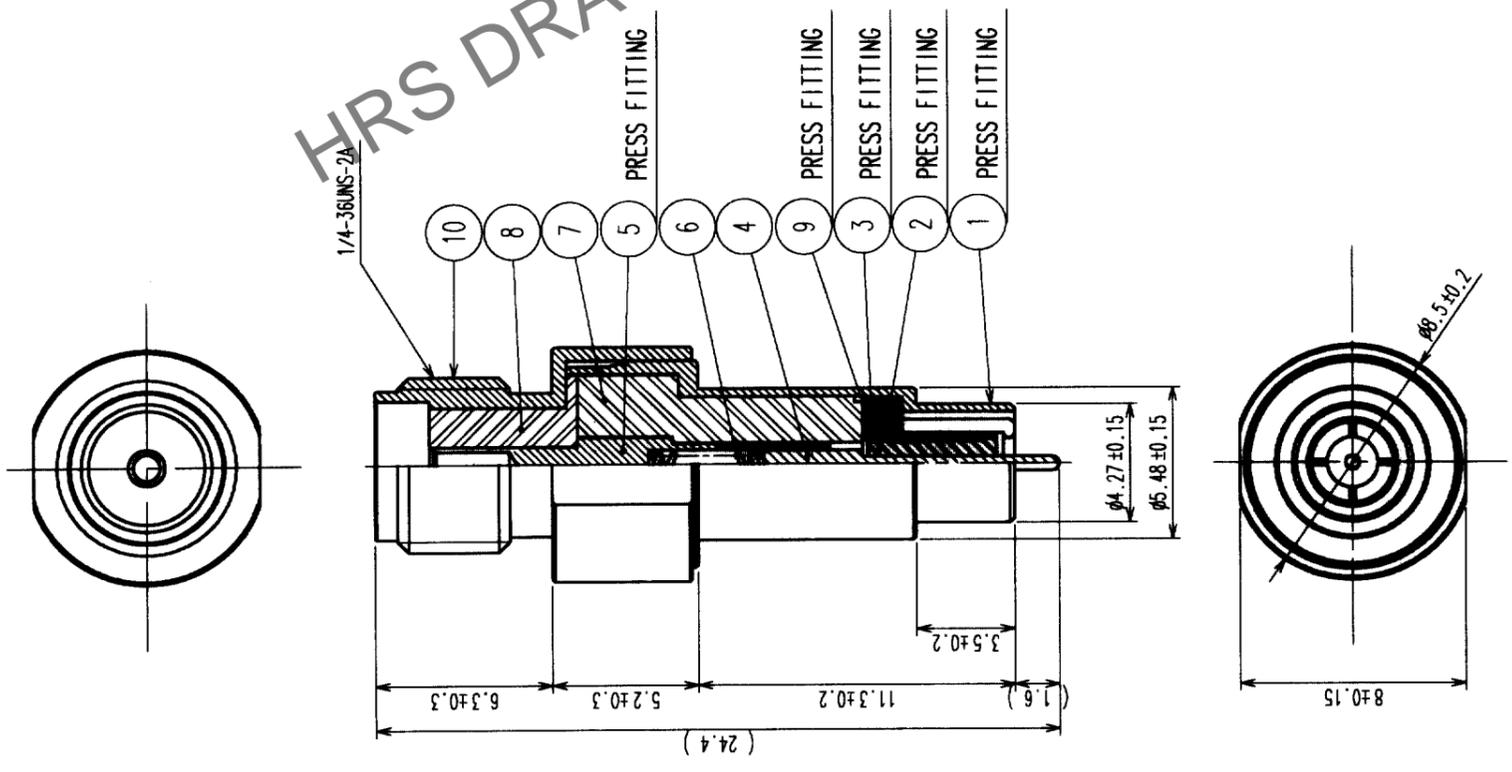

HRS DRAWING FOR REFERENCE

NOTE 1. Use this product with MS-156 (CL358-0167-4).
 2. Mating angle must be less than ±2 degree. (refer to figure 1)

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
5	BERYLLIUM COPPER	GOLD	10	STAINLESS STEEL	PASSIVATE
4	PHOSPHOR BRONZE	GOLD	9	PTFE	
3	PHOSPHOR BRONZE	NICKEL	8	PTFE	
2	PHOSPHOR BRONZE	GOLD	7	PTFE	
1	PHOSPHOR BRONZE	NICKEL	6	STAINLESS STEEL	GOLD

CODE NO. (OLD)	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
<i>K. Nishida</i>	<i>K. Nishida</i>	<i>K. Yamamoto</i>	<i>Y. Tsubota</i>	
02.6.26	02.6.26	02.6.26	02.6.27	

DRAWING NO.	PART NO.
EDC3-180280	MS-156-HRMJ-2

SCALE	UNITS	ITEM
4 : 1	MM	

CODE NO.	CL
CL358-0170-2	1/1

TO	
RFD	